
Machine foot HXJC-FE300(I)-HXE56260

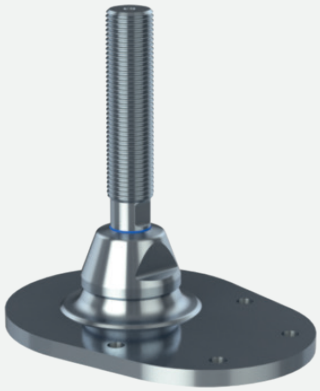

ARTICLE NUMBER 2000194

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact design
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications		
Antislip	NEJ	
Drawing no.	NGI 155905	
Footplate diameter	300 mm	11.81"
Footplate shape	Drop	
Height adjustment	135 mm	5.31"
Height max.	335 mm	13.19"
Height min.	200 mm	7.87"
Height total	380 mm	14.96"
Mounting holes	4 Pieces	
Net weight	25461 g	
Nom. load	188000 N	42264.08lbs
Nom. pull	39000 N	8767.55lbs
Sleeve diameter	56 mm	2.20"
Sleeve length	55 mm	2.17"
Spindle length	265 mm	10.43"
Thread diameter	56 mm	2.20"
Thread length	225 mm	8.86"
Thread size	M56	
Thread standard	Metric C	

Technical specifications

Patent protected

