
Machine foot HXJE250(I)-HXE90250

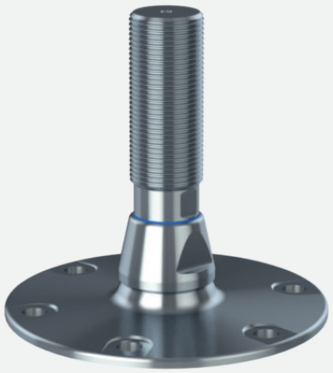

ARTICLE NUMBER 2000320

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact desig
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 154704	
Footplate diameter	249 mm	9.80”
Footplate shape	Round	
Height adjustment	67 mm	2.64”
Height max.	308 mm	12.13”
Height min.	241 mm	9.49”
Height total	380 mm	14.96”
Mounting holes	3 Pieces	
Net weight	26876 g	
Nom. load	432000 N	97117.46lbs
Nom. pull	63000 N	14162.96lbs
Rubber type	SEPDM75	
Sleeve diameter	90 mm	3.54”
Sleeve length	55 mm	2.17”
Spindle length	255 mm	10.04”
Thread diameter	90 mm	3.54”
Thread length	211 mm	8.31”
Thread size	M90x6.00	
Thread standard	Metric C	

Technical specifications

