
# Machine foot HXJE-HEX250(I)-HXEH90250

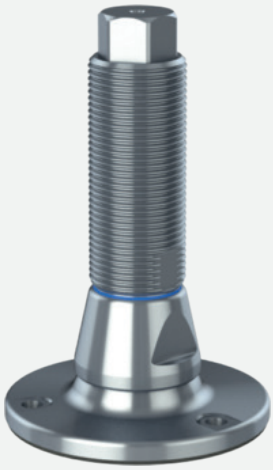

ARTICLE NUMBER 2000330

## Type HXJEHEX + HXJCFEHEX

The design and patent protected seismic HXJEHEX + HXJCFE-HEX levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact design
- Can be adjusted via hex at the top of the spindl
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

## Technical specifications

| | | |
|---|---|---|
| Antislip | Yes | |
| Drawing no. | NGI 155027 | |
| Footplate diameter | 249 mm | 9.80” |
| Footplate shape | Round | |
| Height adjustment | 143 mm | 5.63” |
| Height max. | 275 mm | 10.83” |
| Height min. | 132 mm | 5.20” |
| Height total | 387 mm | 15.24” |
| Mounting holes | 3 Pieces | |
| Net weight | 26601 g | |
| Nom. load | 432000 N | 97117.46lbs |
| Nom. pull | 63000 N | 14162.96lbs |
| Rubber type | SEPDM75 | |
| Sleeve diameter | 90 mm | 3.54” |
| Sleeve length | 55 mm | 2.17” |
| Spindle length | 255 mm | 10.04” |
| Thread diameter | 90 mm | 3.54” |
| Thread length | 255 mm | 10.04” |
| Thread size | M90x6.00 | |
| Thread standard | Metric C | |

## Technical specifications

