
Machine foot HXJE250(s)-HXE36210

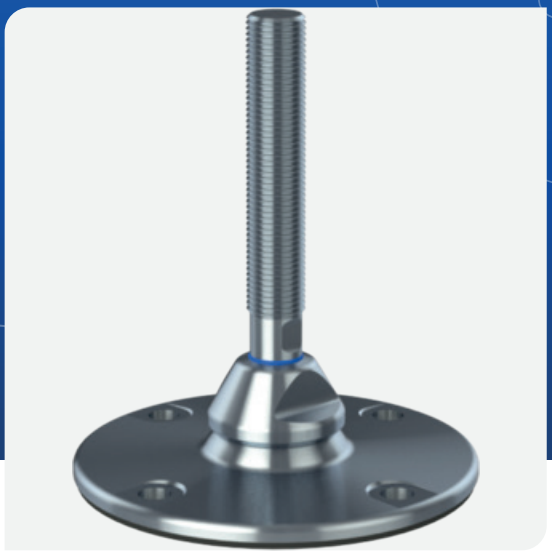

ARTICLE NUMBER 2000355

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact desig
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications

Antislip	Yes	
Drawing no.	NGI 154652	
Footplate diameter	249 mm	9.80"
Footplate shape	Round	
Height adjustment	125 mm	4.92"
Height max.	259 mm	10.20"
Height min.	134 mm	5.28"
Height total	288 mm	11.34"
Mounting holes	4 Pieces	
Nom. Load	96000 N	
Nom. pull	61000 N	
Rubber type	SEPDM75	
Sleeve diameter	36 mm	1.42"
Sleeve length	55 mm	2.17"
Spindle length	215 mm	8.46"
Thread diameter	36 mm	1.42"
Thread length	183 mm	7.20"
Thread size	M36	
Thread standard	Metric C	

Technical specifications

