
Machine foot HXJE250(s)-HXE48260

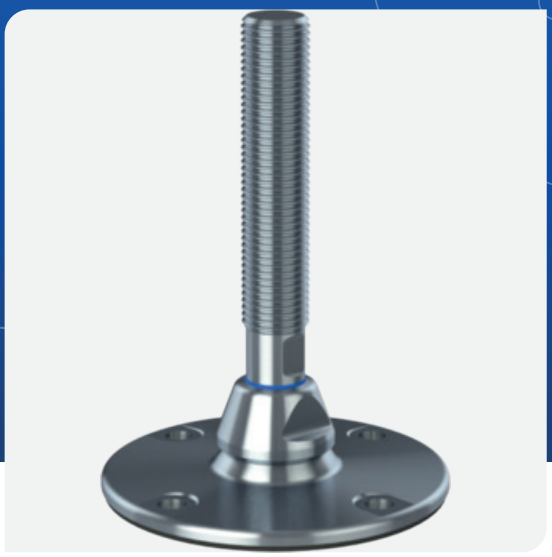

ARTICLE NUMBER 2000359

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact desig
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications

Antislip	Yes	
Drawing no.	NGI 154660	
Footplate diameter	249 mm	9.80"
Footplate shape	Round	
Height adjustment	146 mm	5.75"
Height max.	305 mm	12.01"
Height min.	159 mm	6.26"
Height total	343 mm	13.50"
Mounting holes	4 Pieces	
Nom. Load	140000 N	
Nom. pull	61000 N	
Rubber type	SEPDM75	
Sleeve diameter	48 mm	1.89"
Sleeve length	55 mm	2.17"
Spindle length	265 mm	10.43"
Thread diameter	48 mm	1.89"
Thread length	222 mm	8.74"
Thread size	M48x5.0	
Thread standard	Metric C	

Technical specifications

