
Machine foot HXJE400(I)-HXE90310

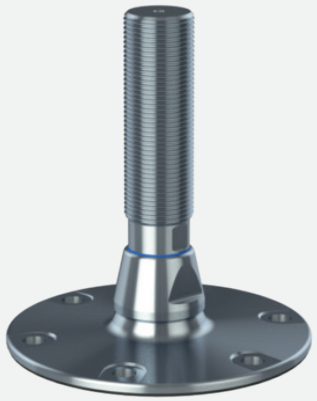

ARTICLE NUMBER 2000501

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact desig
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 154842	
Footplate diameter	399 mm	15.71"
Footplate shape	Round	
Height adjustment	125 mm	4.92"
Height max.	366 mm	14.41"
Height min.	241 mm	9.49"
Height total	438 mm	17.24"
Mounting holes	6 Pieces	
Net weight	39706 g	
Nom. load	432000 N	97117.46lbs
Nom. pull	126000 N	28325.93lbs
Rubber type	SEPDM75	
Sleeve diameter	90 mm	3.54"
Sleeve length	55 mm	2.17"
Spindle length	313 mm	12.32"
Thread diameter	90 mm	3.54"
Thread length	269 mm	10.59"
Thread size	M90x6.00	
Thread standard	Metric C	

Technical specifications

