
Machine foot HXJE-HEX400(I)-HXEH90310

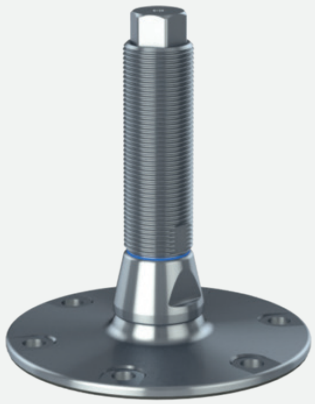

ARTICLE NUMBER 2000511

Type HXJEHEX + HXJCFEHEX

The design and patent protected seismic HXJEHEX + HXJCFE-HEX levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact design
- Can be adjusted via hex at the top of the spindl
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications

Antislip	Yes	
Drawing no.	NGI 155168	
Footplate diameter	399 mm	15.71"
Footplate shape	Round	
Height adjustment	201 mm	7.91"
Height max.	333 mm	13.11"
Height min.	132 mm	5.20"
Height total	445 mm	17.52"
Mounting holes	6 Pieces	
Net weight	39436 g	
Nom. load	432000 N	97117.46lbs
Nom. pull	126000 N	28325.93lbs
Rubber type	SEPDM75	
Sleeve diameter	90 mm	3.54"
Sleeve length	55 mm	2.17"
Spindle length	313 mm	12.32"
Thread diameter	90 mm	3.54"
Thread length	313 mm	12.32"
Thread size	M90x6.00	
Thread standard	Metric C	

Technical specifications

