
Machine foot HXJE150(s) Special HXE36-135, hex

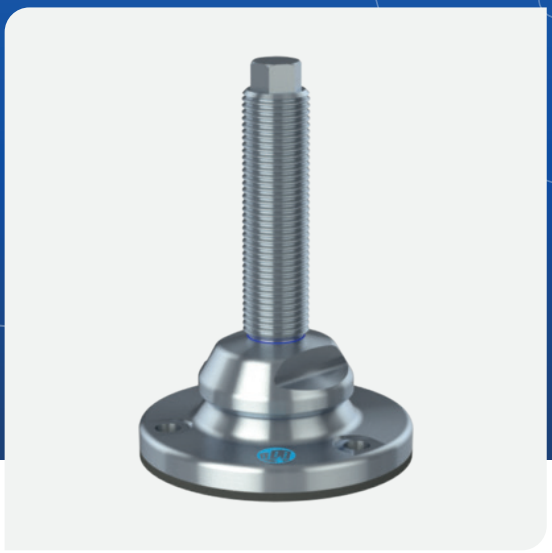

ARTICLE NUMBER 2000583

Type HXJE + HXJCFE

The design and patent protected seismic HXJE + HXJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes.

- Simple and fast installation with height-adjustable compact desig
- Movable set-up - no concrete molding required
- Total seismic stability through bolted fixation and patented locking mechanism
- Verified through Finite Element Analysis (FEA) and calculated according to New Zealand seismic standard (NZS 4219)
- Seismic anchors chosen and approved by our experienced partner Hilti
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 243111	
Footplate diameter	150 mm	5.91"
Footplate shape	Round	
Height adjustment	75 mm	2.95"
Height max.	202 mm	7.95"
Height min.	144 mm	5.67"
Height total	231 mm	9.09"
Mounting holes	3 Pieces	
Net weight	4631 g	
Nom. load	60000 N	13488.54lbs
Nom. pull	17000 N	3821.75lbs
Sleeve diameter	30 mm	1.18"
Sleeve length	55 mm	2.17"
Spindle length	150 mm	5.91"
Thread diameter	36 mm	1.42"
Thread length	150 mm	5.91"
Thread size	M36	
Thread standard	Metric C	

Technical specifications

