
Machine foot XHJ-SE300(I)-XHJ-SE64260-RHOXS64100

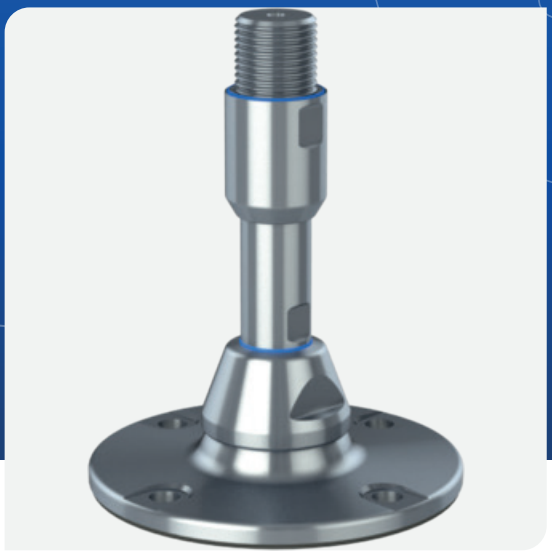

ARTICLE NUMBER 2000129

Type XHJSE + XHJCFE

The design and patent protected seismic XHJSE + XHJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes and also has to to comply with the strictest hygienic requirements.

- Total seismic stability and bolted fixation to concrete floors
- Movable set-up - no concrete moulding required
- Seismic anchors chosen and approved by our experienced partner Hilti
- Patented locking mechanism secures seismic stability
- Calculated according to international seismic standard NZS 4219
- Design verified through Finite element simulation
- Designed according to the 3-A and EHEDG hygienic standards
- Certified according to USDA hygienic standard
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications

Antislip	Yes	
Drawing no.	NGI 146798	
Footplate diameter	299 mm	11.77"
Footplate shape	Round	
Height adjustment	65 mm	2.56"
Height max.	321 mm	12.64"
Height min.	256 mm	10.08"
Height total	379 mm	14.92"
Mounting holes	4 Pieces	
Nom. Load	236000 N	
Nom. pull	82000 N	
Rubber type	SEPDM75	
Sleeve diameter	64 mm	2.52"
Sleeve length	100 mm	3.94"
Spindle length	265 mm	10.43"
Thread diameter	64 mm	2.52"
Thread length	152 mm	5.98"
Thread size	M64x6.0	
Thread standard	Metric C	

Technical specifications

