
Machine foot XHJ-SE400(I)-XHJ-SE90250-RHOXS9085

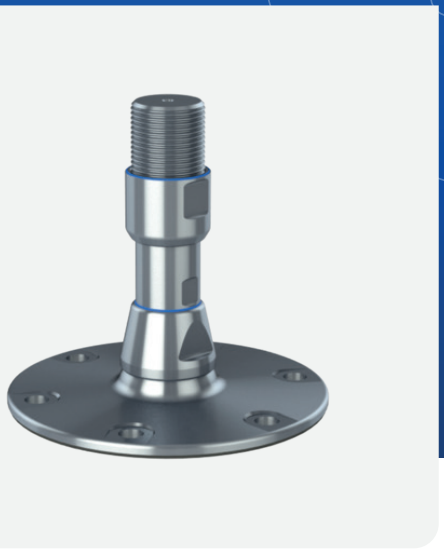

ARTICLE NUMBER 2000154

Type XHJSE + XHJCFE

The design and patent protected seismic XHJSE + XHJCFE levelling foot is the optimal choice for machinery, equipment, tanks and vessels located in areas subject to earthquakes and also has to to comply with the strictest hygienic requirements.

- Total seismic stability and bolted fixation to concrete floors
- Movable set-up - no concrete moulding required
- Seismic anchors chosen and approved by our experienced partner Hilti
- Patented locking mechanism secures seismic stability
- Calculated according to international seismic standard NZS 4219
- Design verified through Finite element simulation
- Designed according to the 3-A and EHEDG hygienic standards
- Certified according to USDA hygienic standard
- Stainless steel AISI 304/A2, 1.4301. Optional AISI 316/A4, 1.4401

Technical specifications

Antislip	Yes	
Drawing no.	NGI 146854	
Footplate diameter	399 mm	15.71”
Footplate shape	Round	
Height adjustment	40 mm	1.57”
Height max.	295 mm	11.61”
Height min.	255 mm	10.04”
Height total	380 mm	14.96”
Mounting holes	6 Pieces	
Net weight	37956 g	
Nom. load	432000 N	97117.46lbs
Nom. pull	126000 N	28325.93lbs
Rubber type	SEPDM75	
Sleeve diameter	90 mm	3.54”
Sleeve length	85 mm	3.35”
Spindle length	255 mm	10.04”
Thread diameter	90 mm	3.54”
Thread length	164 mm	6.46”
Thread size	M90x6.00	
Thread standard	Metric C	

Technical specifications

