Machine foot HXJ-AS105-42-230, 2 fixati-ons



ARTICLE NUMBER 1005131

Type HXJ/HXJ AS

The design and patent protected solid HXJ and HXJ AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments.

Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.


It is the most hygienic solid fully-threaded levelling foot that can be fastened to the floor by the two fixing holes in the footplate. Bolts, nuts and washers can be supplied.

The joined connection between the spindle and the footplate is designed for high load and high pull, and the low-friction washer between the spindle and footplate ensures easy adjustment under high pressure.

The HXJ AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 058773	
Footplate diameter	105 mm	4.13”
Height adjustment	244 mm	9.61”
Height max.	237 mm	9.33”
Height min.	81 mm	3.19”
Height total	271 mm	10.67”
Mounting holes	2 Pieces	
Net weight	3202 g	
Nom. load	30000 N	6744.27lbs
Nom. load	30000 N	6744.27lbs
Nom. pull	20000 N	4496.18lbs
Rubber type	S75	
Spindle length	244 mm	9.61”
Thread diameter	42 mm	1.65”
Thread length	244 mm	9.61”
Thread size	M42	
Thread standard	Metric C	

Technical specifications

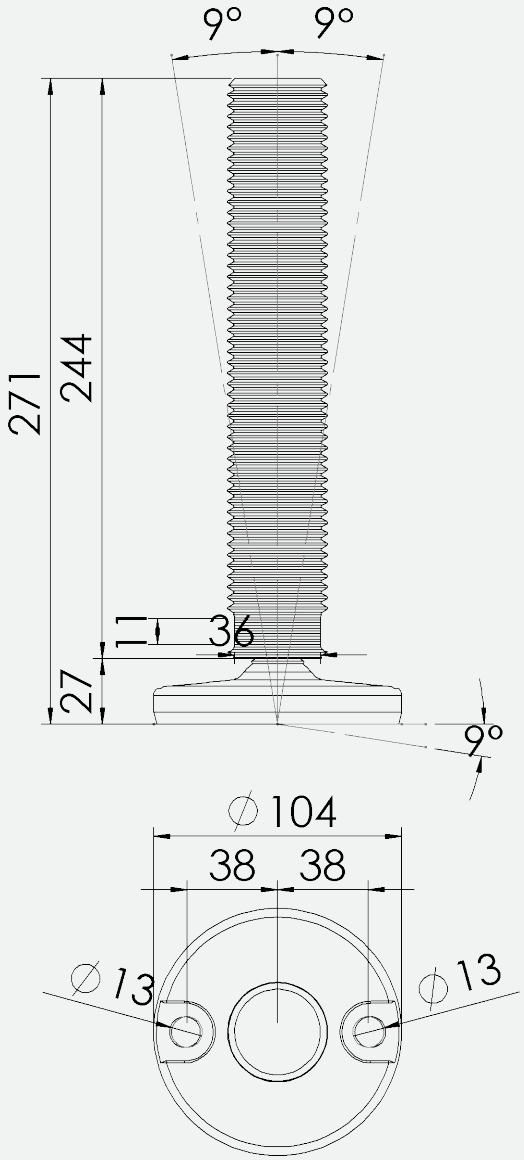

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk