
Machine foot HXG080-16-70

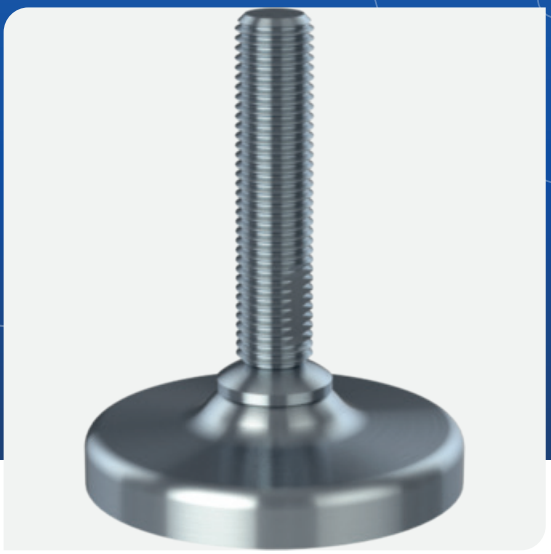

ARTICLE NUMBER 1015016

Type HXG/HXG AS

The design and patent protected solid HXG and HXG AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments and the most hygienic solid fully-threaded levelling foot.

Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.


The joined connection between the spindle and the footplate is designed for high load and high pull, and the low-friction washer between the spindle and footplate ensures easy adjustment under high pressure.

The HXG AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications

Antislip	No	
Drawing no.	NGI 164640	
Footplate diameter	80 mm	3.15"
Height adjustment	73 mm	2.87"
Height max.	86 mm	3.39"
Height min.	64 mm	2.52"
Height total	99 mm	3.90"
Mounting holes	0 Pieces	
Nom. load	30800 N	
Nom. pull	20000 N	
Spindle length	73 mm	2.87"
Thread diameter	16 mm	0.63"
Thread length	73 mm	2.87"
Thread size	M16	
Thread standard	Metric C	

Technical specifications

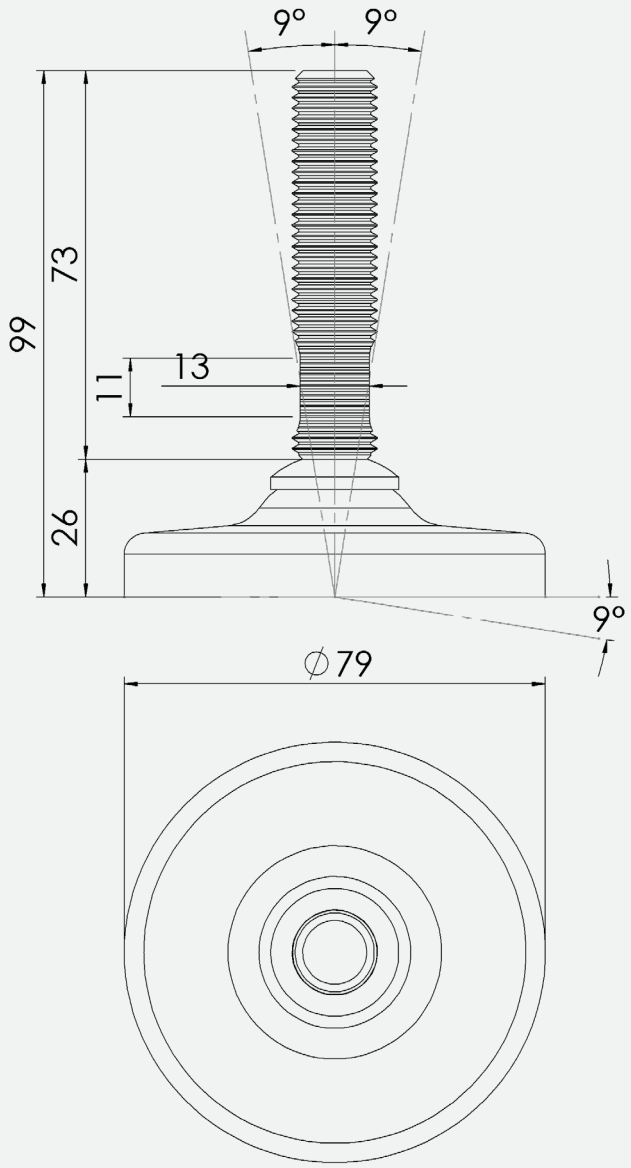

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk