
Machine foot HXGT150-42-230

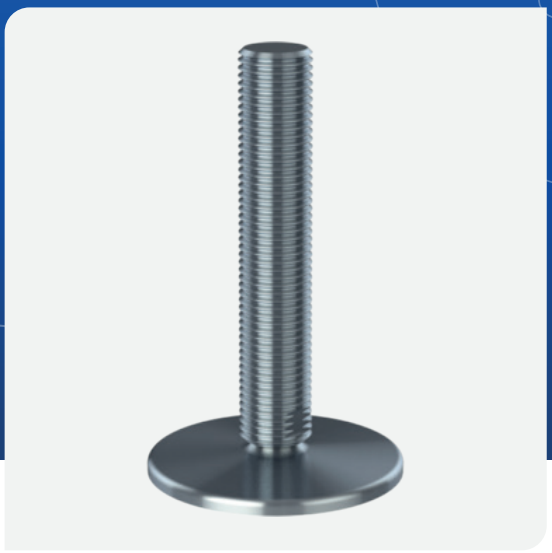

ARTICLE NUMBER 1015300

Type HXGT/HXGT AS

The design and patent protected solid HXGT and HXGT AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments and the most hygienic solid fully-threaded levelling foot.

The HXGT and HXGT AS consist of a separated footplate and spindle connected by the diametrically centered elevation on the footplate.

Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.

The HXGT AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications		
Antislip	No	
Drawing no.	NGI 165785	
Footplate diameter	150 mm	5.91”
Height adjustment	230 mm	9.06”
Height max.	216 mm	8.50”
Height min.	76 mm	2.99”
Height total	250 mm	9.84”
Mounting holes	0 Pieces	
Net weight	3755 g	
Nom. load	110000 N	24728.98lbs
Nom. pull	0	0.00lbs
Spindle length	230 mm	9.06”
Thread diameter	42 mm	1.65”
Thread length	230 mm	9.06”
Thread size	M42	
Thread size	M42	
Thread standard	Metric C	

Technical specifications

