Machine foot HXGT125-54-3



ARTICLE NUMBER 1008003

Type HXGT/HXGT AS

The design and patent protected solid HXGT and HXGT AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments and the most hygienic solid fully-threaded levelling foot.

The HXGT and HXGT AS consist of a separated footplate and spindle connected by the diametrically centered elevation on the footplate.


Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.

The HXGT AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications

Antislip	No	
Drawing no.	NGI 120163	
Footplate diameter	125 mm	4.92"
Height adjustment	76.20 mm	3.00"
Height max.	68 mm	2.68"
Height min.	69 mm	2.72"
Height total	95 mm	3.74"
Mounting holes	0 Pieces	
Nom. load	110000 N	
Nom. pull	0 N	
Spindle length	76.20 mm	3.00"
Thread diameter	54 mm	2.13"
Thread length	76.20 mm	3.00"
Thread size	UNC 1 1/4-7	
Thread standard	UNC	

Technical specifications

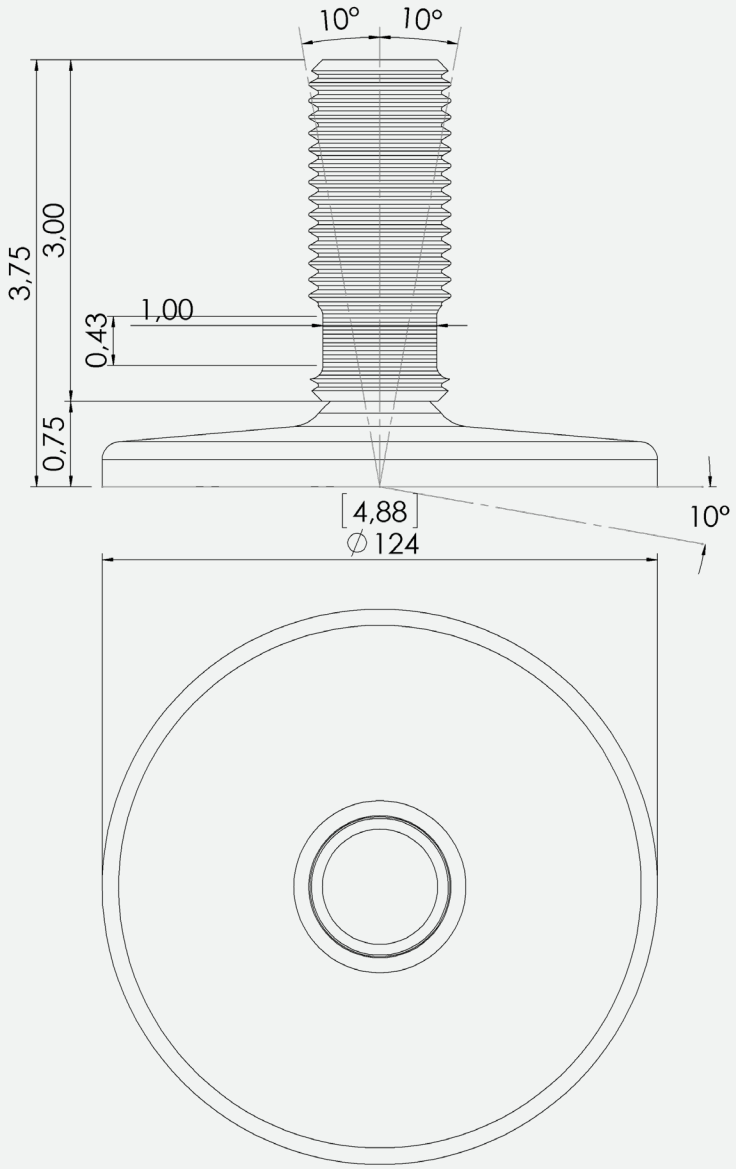

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk