Machine foot HXG105-36-180



ARTICLE NUMBER 1011432

Type HXG/HXG AS

The design and patent protected solid HXG and HXG AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments and the most hygienic solid fully-threaded levelling foot.


Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.

The joined connection between the spindle and the footplate is designed for high load and high pull, and the low-friction washer between the spindle and footplate ensures easy adjustment under high pressure.

The HXG AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications		
Antislip	No	
Drawing no.	NGI 058427	
Footplate diameter	104 mm	4.09"
Height adjustment	195 mm	7.68"
Height max.	187 mm	7.36"
Height min.	73 mm	2.87"
Height total	216 mm	8.50"
Mounting holes	0 Pieces	
Net weight	2163 g	
Nom. load	110000 N	24728.98lbs
Nom. pull	20000 N	4496.18lbs
Spindle length	195 mm	7.68"
Thread diameter	36 mm	1.42"
Thread length	195 mm	7.68"
Thread size	M36	
Thread size	M36	
Thread standard	Metric C	

Technical specifications

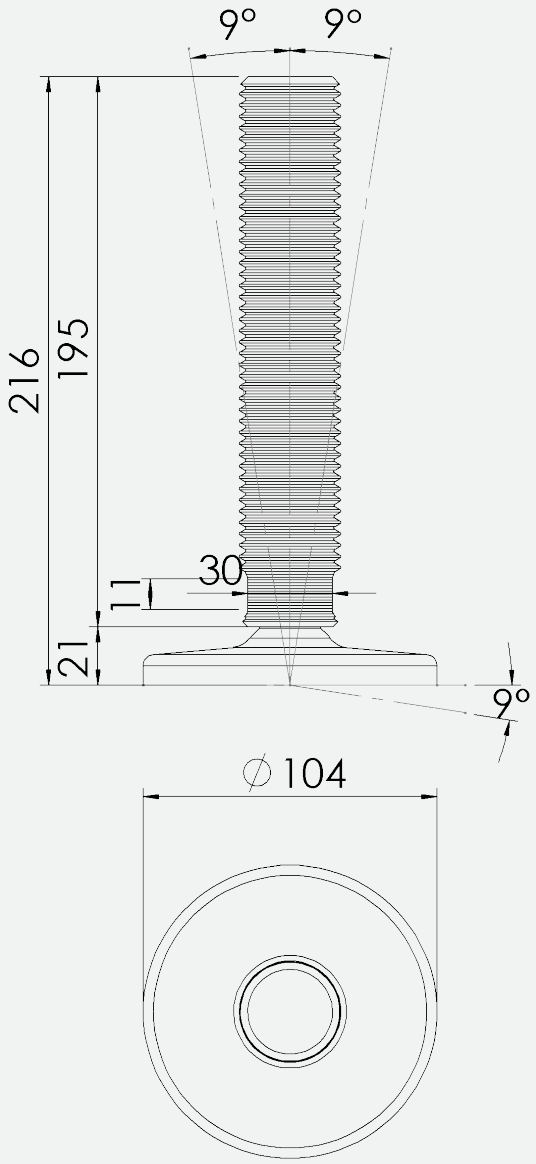

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk