Machine foot HXG105-54-4



ARTICLE NUMBER 1011442

Type HXG/HXG AS

The design and patent protected solid HXG and HXG AS levelling foot is the optimal choice for heavy machinery and equipment in diverse production environments and the most hygienic solid fully-threaded levelling foot.

Reduced cleaning effort is obtained by the hygienic-oriented design with self-draining surfaces.


The joined connection between the spindle and the footplate is designed for high load and high pull, and the low-friction washer between the spindle and footplate ensures easy adjustment under high pressure.

The HXG AS is supplied with vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate and creates a hygienic seal to the floor.

Technical specifications

Antislip	No	
Drawing no.	NGI 058502	
Footplate diameter	105 mm	4.13"
Height adjustment	101.60 mm	4.00"
Height max.	95 mm	3.74"
Height min.	69 mm	2.72"
Height total	122 mm	4.80"
Mounting holes	0 Pieces	
Nom. load	110000 N	
Nom. pull	20000 N	
Spindle length	101.60 mm	4.00"
Thread diameter	54 mm	2.13"
Thread length	101.60 mm	4.00"
Thread size	UNC 1 1/4-7	
Thread standard	UNC	

Technical specifications

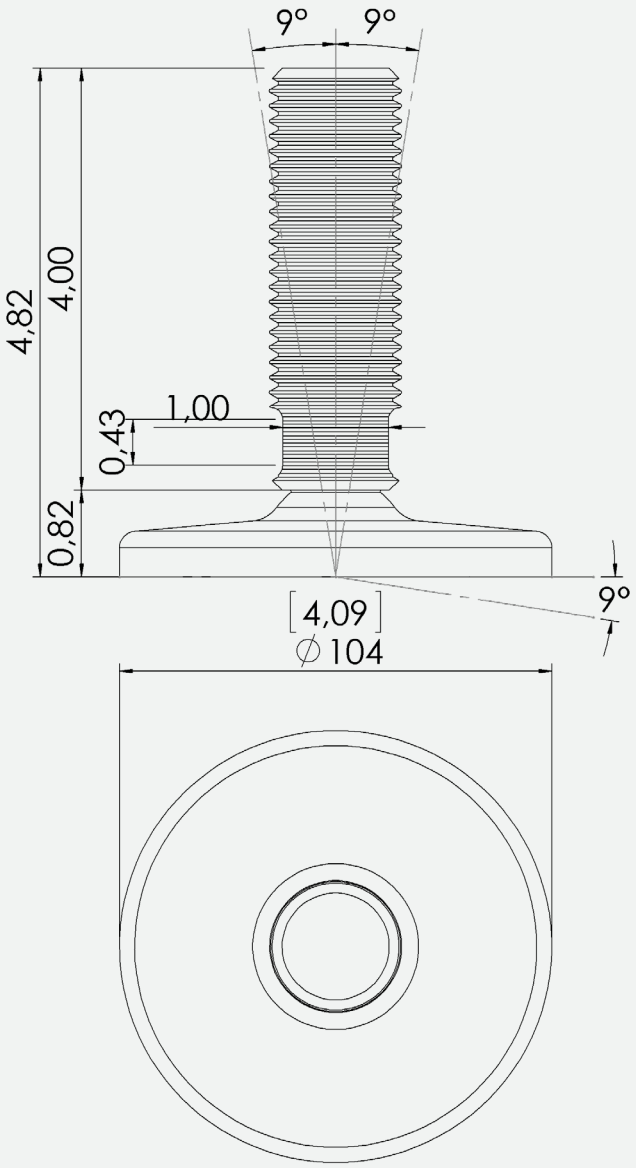

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk