Machine foot HX150-34-3



ARTICLE NUMBER 1003918

Type HX

The design and patent protected HX fully-threaded levelling foot is the optimal choice for machinery and equipment in diverse production environments.


Minimum cleaning effort is obtained by the design of the self-draining surfaces.

Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

The HX Fixing is designed to be fastened to the floor by the fixing plate. Bolt, nut and washer can be supplied.

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 067431	
Footplate diameter	150 mm	5.91"
Height adjustment	76.20 mm	3.00"
Height max.	101 mm	3.98"
Height min.	79 mm	3.11"
Height total	118 mm	4.65"
Mounting holes	0 Pieces	
Net weight	1088 g	
Nom. load	43800 N	9846.63lbs
Nom. pull	4000 N	899.24lbs
Nom. pull	4000 N	899.24lbs
Rubber type	S75	
Spindle length	76.20 mm	3.00"
Thread diameter	34 mm	1.34"
Thread length	76.20 mm	3.00"
Thread size	UNC 3/4	
Thread standard	UNC	

Technical specifications

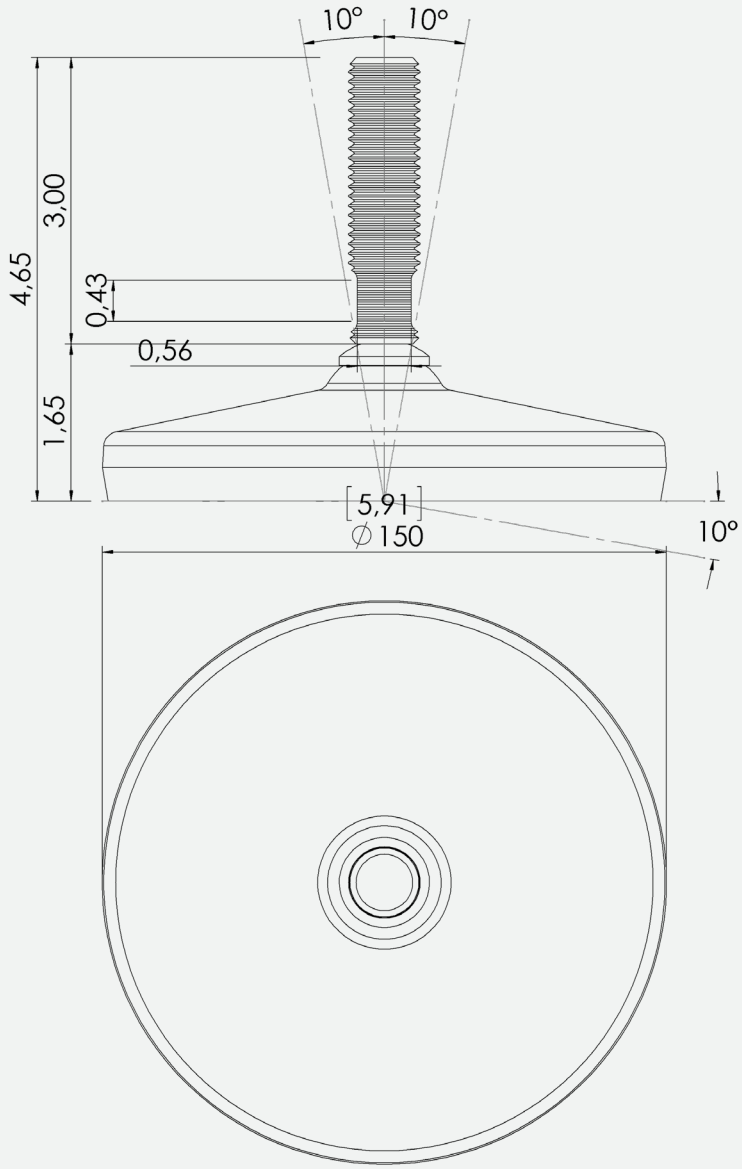

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk