
Machine foot HX-FIX106-UNC 3/4 x 4, AISI 304, Black NBR, 1 fixation

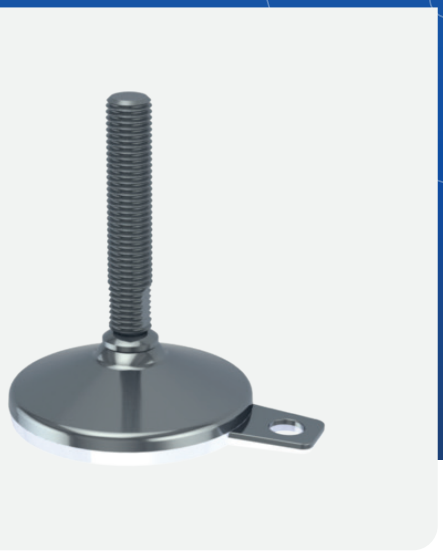

ARTICLE NUMBER 1004138

Type HX

The design and patent protected HX & HX Fixing fully-threaded levelling foot is the optimal choice for machinery and equipment in diverse production environments.

Minimum cleaning effort is obtained by the design of the self-draining surfaces.

Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

The HX Fixing is designed to be fastened to the floor by the fixing plate. Bolt, nut and washer can be supplied.

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 067805	
Footplate diameter	106 mm	4.17"
Height adjustment	101.60 mm	4.00"
Height max.	124 mm	4.88"
Height min.	76 mm	2.99"
Height total	141 mm	5.55"
Mounting holes	1 Pieces	
Net weight	627 g	
Nom. load	22000 N	4945.80lbs
Nom. pull	4000 N	899.24lbs
Nom. pull	4000 N	899.24lbs
Rubber type	SH75A	
Spindle length	101.60 mm	4.00"
Thread diameter	34 mm	1.34"
Thread length	102 mm	4.02"
Thread size	UNC 3/4	
Thread standard	UNC	

Technical specifications

