Machine foot HX080-M20-180, AISI 304, Blue NBR



ARTICLE NUMBER 1018243

Type HX

The design and patent protected HX fully-threaded levelling foot is the optimal choice for machinery and equipment in diverse production environments.


Minimum cleaning effort is obtained by the design of the self-draining surfaces.

Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

The HX Fixing is designed to be fastened to the floor by the fixing plate. Bolt, nut and washer can be supplied.

Technical specifications		
Antislip	Yes	
Drawing no.	NGI 201152	
Footplate diameter	80 mm	3.15”
Height adjustment	136 mm	5.35”
Height max.	195 mm	7.68”
Height min.	59 mm	2.32”
Height total	211 mm	8.31”
Mounting holes	0 Pieces	
Net weight	602 g	
Nom. load	15000 N	3372.13lbs
Rubber type	Sh75A	
Spindle length	172 mm	6.77”
Thread length	172 mm	6.77”
Thread size	M20	
Thread size	M20	
Thread standard	Metric C	

Technical specifications

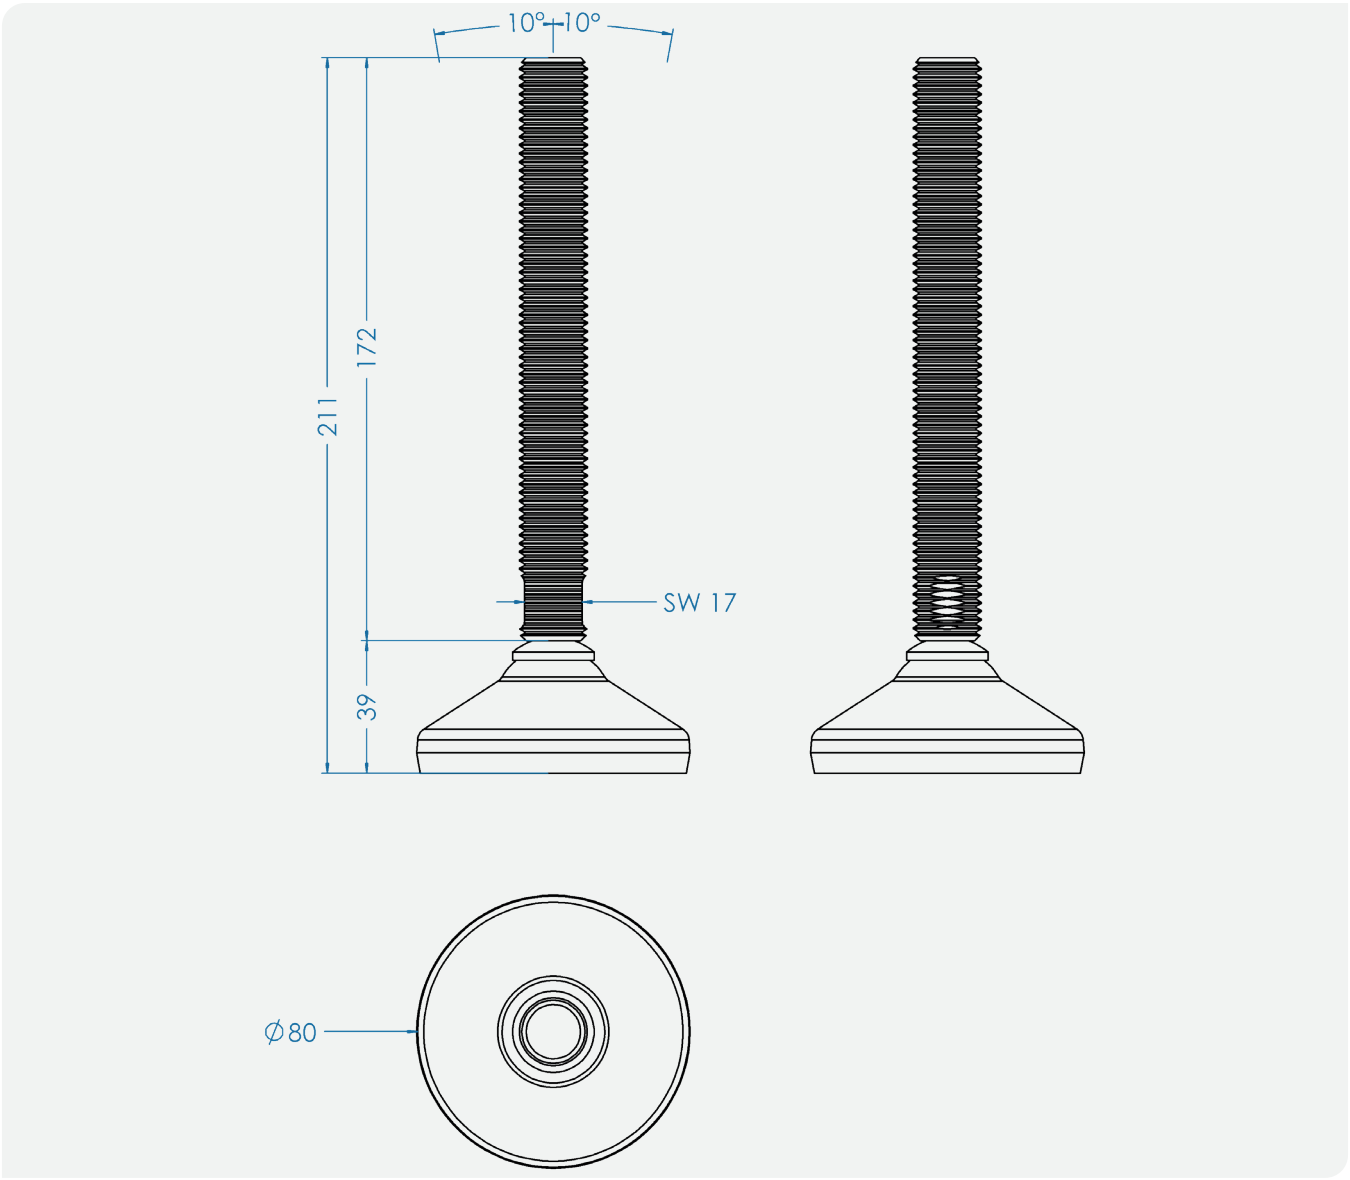

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk