Machine foot XH150-XH20280-RHOX20115



ARTICLE NUMBER 1026483

Type XH

The design and patent protected XH levelling foot is the optimal choice for machinery and equipment that has to comply with the strictest hygienic requirements.


The thread is covered with a hygienic sleeve which cannot be overadjusted and secures safety against exposed thread. The sleeve also functions as a counter nut.

All movable parts are 100% hygienically sealed even if the load on the foot is removed. All sealings are blue and therefore detectable by scanning systems.

Minimum cleaning effort is obtained by the design of the self-draining surfaces. Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

Technical specifications		
Compression load	24100 N	5417.90lbs
Drawing no.	NGI 293005	
Footplate diameter	150 mm	5.91"
Height adjustment	101 mm	3.98"
Height max.	277 mm	10.91"
Height min.	176 mm	6.93"
Height total	315 mm	12.40"
Mounting holes	0 Pieces	
Net weight	1926 g	
Nom. pull	4000 N	899.24lbs
Rubber type	SH75A	
Sleeve length	2 mm	0.08"
Spindle length	280 mm	11.02"
Thread length	150 mm	5.91"
Thread size	M20	
Thread standard	Metric C	

Technical specifications

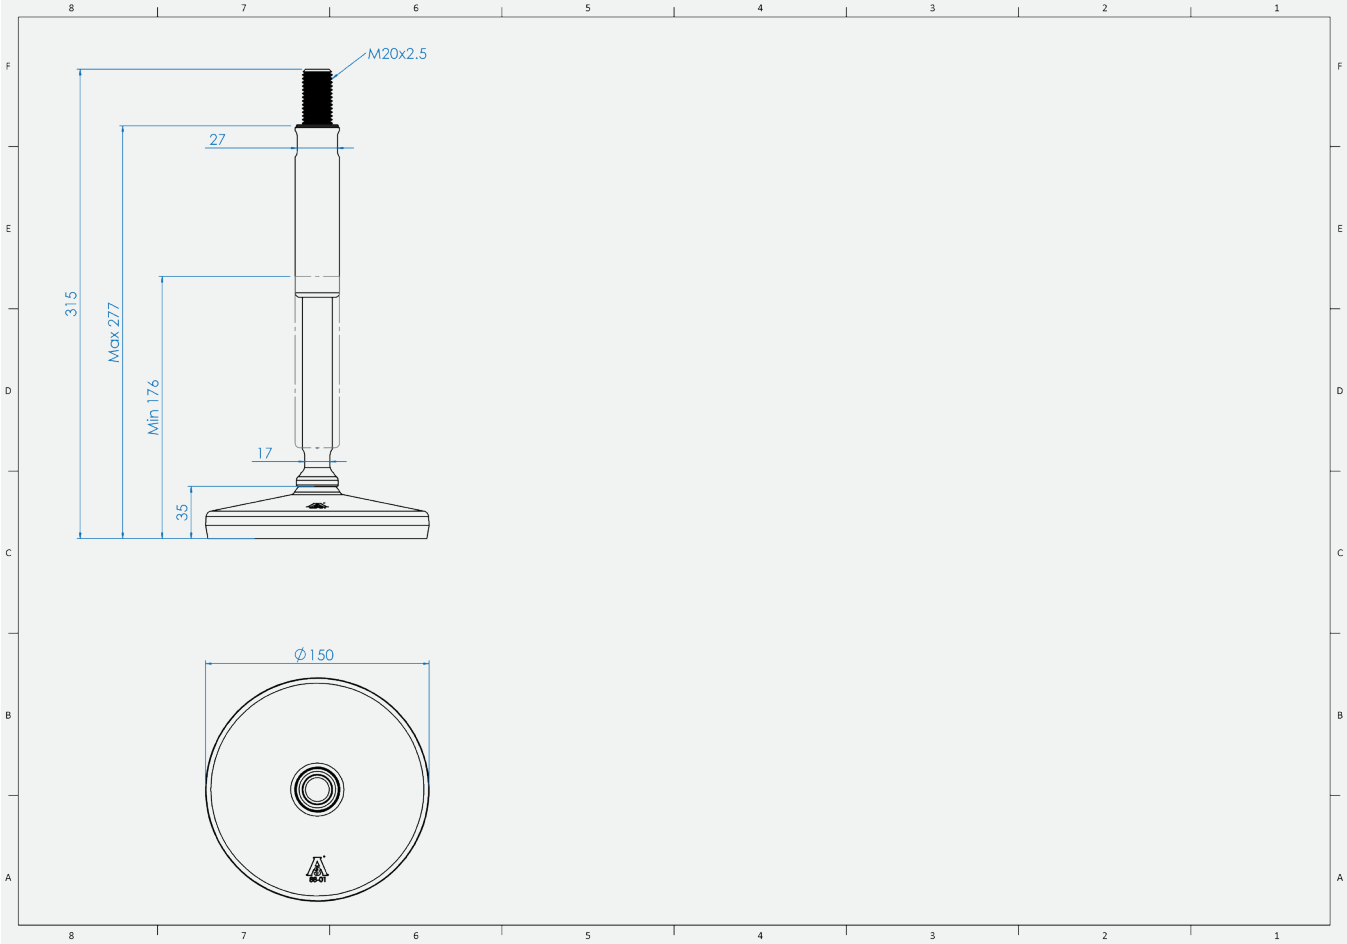

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk