Machine foot XH125-M20 x 150/85-M20 x 50, AISI 304, Black NBR



ARTICLE NUMBER 1000117

Type XH

The design and patent protected XH levelling foot is the optimal choice for machinery and equipment that has to comply with the strictest hygienic requirements.

The thread is covered with a hygienic sleeve which cannot be overadjusted and secures safety against exposed thread. The sleeve also functions as a counter nut.


All movable parts are 100% hygienically sealed even if the load on the foot is removed. All sealings are blue and therefore detectable by scanning systems.

Minimum cleaning effort is obtained by the design of the self-draining surfaces. Additionally, the foot is hygienically sealed to the floor by vulcanized FDA-approved, anti-vibration, anti-slip rubber, which blocks out bacteria underneath the footplate.

Technical specifications

	XH	
Antislip	Yes	
Drawing no.	NGI 066120	
Footplate diameter	125 mm	4.92"
Height adjustment	36 mm	1.42"
Height max.	146 mm	5.75"
Height min.	110 mm	4.33"
Height total	184 mm	7.24"
Mounting holes	0 Pieces	
Net weight	1063 g	
Nom. load	32000 N	7193.89lbs
Nom. pull	4000 N	899.24lbs
Rubber type	SH75A	
Sleeve diameter	20 mm	0.79"
Sleeve length	50 mm	1.97"
SleeveType	RHOX	
Spindle length	150 mm	5.91"
Thread length	85 mm	3.35"
Thread size	M20	
Thread standard	Metric C	

Technical specifications

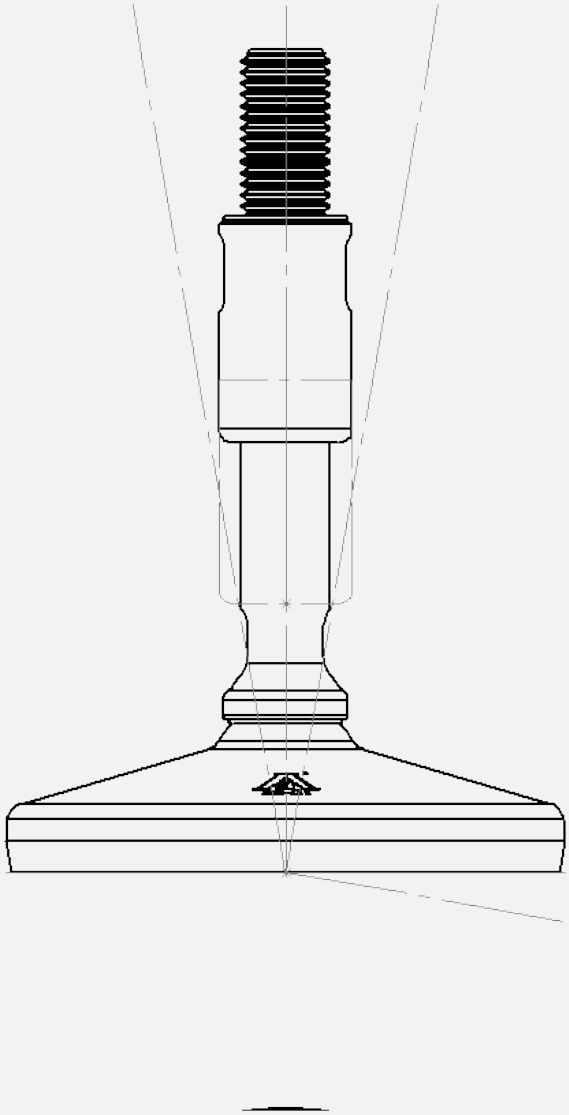

NGI A/S Virkelyst 5 9400 Nørresundby Denmark +45 98 17 45 00 ngi@ngi.dk